

# ClearCal for Computer Displays

## Installation Instructions

See instructional video at <http://radtech.us/clearcaldisplay>




**1.** Before you start, test fit the film to ensure you have the correct size.

Note the amount of margin that the film extends past the viewable display area, typically 4-5mm.




**2.** Be sure that screen, your hands and the film are meticulously clean.

Use a good non-residue cleaner like OmniCleanz and a lint-free cloth to thoroughly clean the screen.

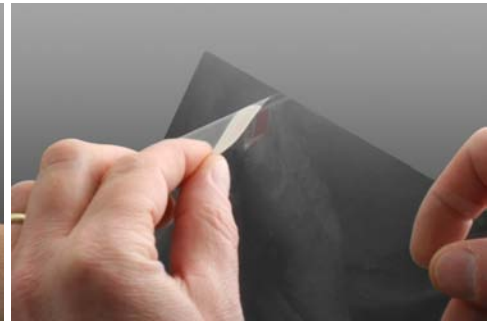

**3.** Peel backer sheet away from film via the paper pull tab.

Use care so as not to crease film.

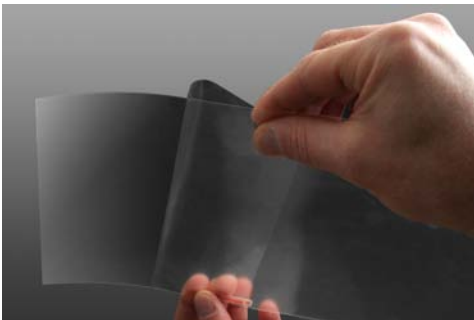

**4.** Peel away 2-3in of the backer sheet and loop it back on itself.

Do not touch sticky side of film!



**5.** Starting in the upper-left corner, lay the edge of the film onto the screen.

The film edges should extend past the viewable portion of the screen as noted in **Step 1**.



**6.** While keeping a slight backward curl on the film, slowly roll it onto the screen.

When 1/3 of the film is down, stop and check the alignment. If it's off, pull the film back and re-align.



**7.** When applying the film, bubbles or bits of dust may be visible. If you see either, pull film back and check for debris on the film or the screen.

Use the sticky side of a piece of tape to pick off debris.



**8.** Continue rolling film.

Bubbles less than 1mm across will disappear within 24 hours. Larger bubbles and debris entrapment should be addressed during installation - See **Step 7**.



**9.** A finger can be used to aid in pushing out entrapped air.

Do not cover iSight camera with film. The iSight camera is located on the upper bezel.



**10.** When the last 1-2in of un-adhered film remain, pull the backer sheet off of the remaining film.



**11.** Use a soft cloth to push any bubbles towards the closest edge. Wipe the entire film, especially the edges, to make sure they are fully adhered to the screen.



**12.** Adhesive side can be cleaned with soap and water and reapplied.